

HMQ-6501 4K SURVEILLANCE DISPLAY WITH SDI


FEATURES



- 4K UHD 3840 x 2160 resolution
- Anti-Burn-in™ technology prevents image ghosting
- Image Enhancer: 3D Comb Filter / Deinterlace / Noise Reduction
- Versatile connectivity: SDI, HDMI, DVI, VGA, Composite (BNC)
- Supports multiple SDI formats: 3G/HD/SD-SDI
- Embedded audio in SDI up to 8 channels of 48kHz
- BNC passive loop-through output port
- RS232/LAN Control - provides compatibility with control systems
- Dark surveillance enhancement with CCTV mode & black-level adjustment
- Selectable gamma curves optimise different kinds of images
- Compatible with Neovo Controller for simultaneous multi-display control
- Optional blue or black screen when no input signal is detected
- Lockable control keys to prevent tampering in public environments
- Commercial-grade panel for high reliability and long product lifetime
- 24/7 Operation with a rugged metal housing design

The HMQ-6501 is a 65-inch 4K surveillance display with SDI that supports live video streaming over long distances in surveillance and monitoring applications. The display technology is future-proof and compatible with analogue and digital surveillance systems. The HMQ-6501 supports up to 8MP image quality through an HDMI connection to present crisp video footage. With SDI loop-through design, the display can receive real-time 1080p images from HD-SDI or 3G-SDI cameras and transmit the uncompressed videos to multiple SDI displays with ultra-low latency. It fulfils the need for high-quality image details to live video monitoring in broadcasting and video surveillance solutions.

TECHNICAL DRAWING

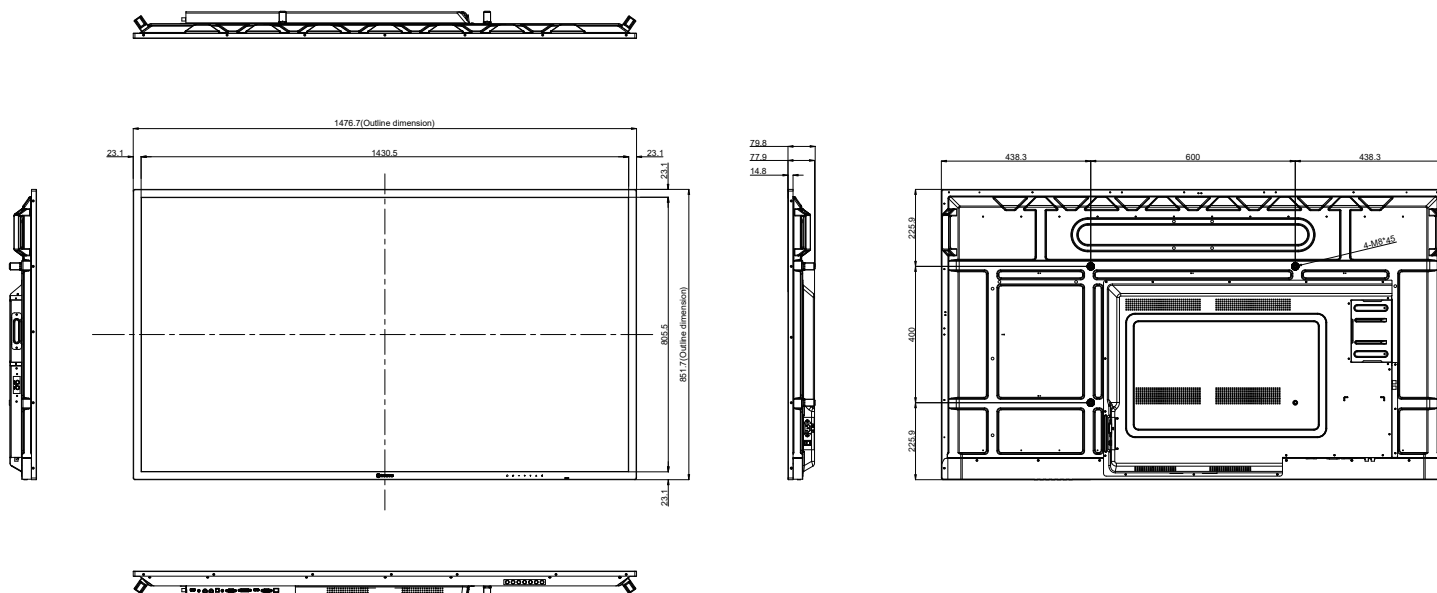

SPECIFICATIONS

Panel	
Panel Type	LED-Backlit TFT LCD (IPS Technology)
Panel Size	64.5"
Max. Resolution	UHD 3840 x 2160
Pixel Pitch	0.372 mm
Brightness	400 cd/m ²
Contrast Ratio	1200:1
Viewing Angle (H/V)	178°/178°
Display Colour	1.07G
Response Time	5 ms
Surface Treatment	Anti-Glare Treatment (Haze 1%), 3H Hard Coating
Frequency	
Frequency (H)	15 kHz ~ 135 kHz
Frequency (V)	24 Hz ~ 86 Hz
Signal Input	
SDI	BNC x 1
HDMI	2.0 x 1
DVI	24-Pin DVI-D
VGA	15-Pin D-Sub x 1
Composite	BNC x 1
Signal Output	
SDI	BNC x 1
Composite	BNC x 1
External Control	
RS232 In	9-Pin D-Sub
LAN	RJ45 x 1
Other Connectivity	
USB	2.0 x 1 (Service Port)
Audio	
Audio In	Stereo Audio Jack (3.5 mm)
Audio Out	S/PDIF
	Stereo Audio Jack (3.5 mm)
Internal Speakers	10 W x 2
Power	
Power Requirements	AC 100-240V, 50/60 Hz
On Mode	123W (On)
Standby Mode	< 0.5W
Off Mode	< 0.3W
Power Supply	Internal
Operating Conditions	
Temperature	0°C-40°C (32°F-104°F)
Humidity	20%-85% (non-condensing)
Storage Conditions	
Temperature	-10°C-60°C (-4°F-140°F)
Humidity	10%-95% (non-condensing)
Mounting	
VESA FPM PMI	Yes (600 x 400 mm)
Dimensions	
Product w/o Base (W x H x D)	1476.7 x 851.7 x 79.8 mm (58.1" x 33.5" x 3.1")
Packaging (W x H x D)	1660.0 x 1045.0 x 220.0 mm (65.4" x 41.1" x 8.7")
Weight	
Product w/o Base	26.2 kg (57.8 lb)
Packaging	36.7 kg (80.9 lb)
Regulation Approval	
Certifications & Compliance	CE, LVD, WEEE, RoHS, REACH, EAC, UKCA, FCC, ICES-003 Issue 7
Accessories	
Supplied	HDMI Cable, Power Cord, Quick Start Guide, Remote Control (Batteries not included)
Optional Accessories	
Ceiling Mount (Landscape only)	CMP-01 + LMK-01
Floor Mount (Landscape only)	FMC-07
Wall Mount (Landscape only)	LMA-02, LMK-01, LMK-03



All specifications are subject to change without prior notice.
Copyright © 2025 AG Neovo. All rights reserved.
The name AG Neovo is a trademark of AIC.
All other trademarks are the property of their respective owners.
P/C: HM651A Version 3.0, 20251003