Aneovo

IFP-6503 65-INCH 4K INTERACTIVE FLAT PANEL DISPLAY



 \square

USB-C

FEATURES

- 4K UHD 3840 x 2160 resolution
- IPS Panel technology offers high color accuracy and wide viewing angles
- Incorporates IR touch technology
- · 20-point simultaneous multi-touch capability
- Two styluses for simultaneous annotation with two colors
- Android OS 9.0 platform
- Windows 11 ready plug and play support for Windows 7/8/10/11
- User-friendly Meetboard Whiteboard App for collaborative meetings
- The Screen-sharing App for multi-display control and wireless mirroring
- View, edit & create office documents with WPS Office Suite App
- · Files sharing via email, QR Code, Cloud Drives, Samba and FTP portals
- A USB Type-C port for digital signal, data and 65W power delivery
- Built-in speakers and audio mini-jack in/out connections
- Wall mounts and the Wi-Fi module are included for quick installation
- An optional FMC-06 mobile cart allows easy movement and accessory
 assembly


Meetboard IFP-Series interactive display offers a future-proof all-in-one collaborative hub for various settings, such as classrooms, meeting rooms and coworking spaces. Built on the Android OS platform, Meetboard is ideal for getting meetings and presentations going right away, without the need for additional devices or software. Present, brainstorming and taking notes cannot be more effortless on Meetboard, bringing a neat and organized space.


ا کینے

TECHNICAL DRAWING

20

4K



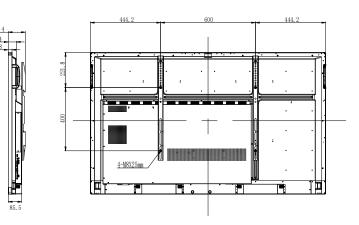



SPECIFICATIONS

Panel Panel Type Panel Size Max. Resolution Pixel Pitch Brightness Contrast Ratio Viewing Angle (H/V) Display Colour Response Time Surface Treatment Frequency Frequency (H) Frequency (V) Signal Input HDMI VGA Signal Output HDMI External Control RS232 In LAN Embedded Player OS CPU Memory Storage Other Connectivity USB Audio Audio In Audio Out Internal Speakers **Touch Screen** Technology Positional Accuracy Panel Interface Single Touch Plug & Play Multi-touch Plug & Play Multi-touch Support by Driver Power Power Requirements On Mode Standby Mode Off Mode Power Supply Glass Thickness Transmission Rate Hardness Gloss **Operating Conditions** Temperature Humidity Storage Conditions Temperature Humidity Mounting VESA FPMPMI Dimensions Product with Bracket (W x H x D) Product w/o Bracket (W x H x D) Packaging (W x H x D) Weight Product w/o Base Product with Base Packaging **Regulation Approval** Certifications & Compliance Accessories Supplied **Optional Accessories** Ceiling Mount (Landscape only) Wall Mount (Landscape only)

Floor Mount (Landscape only)

LED-Backlit TFT LCD (IPS Technology)
64.5"
UHD 3840 x 2160
0.373 mm
400 cd/m ²
1200 : 1
178°/178°
1.07B 5 ms
Haze 25%, 3H, Anti-glare treatment
haze 20%, on, And gide deathent
30 kHz-80 kHz
50 Hz-76 Hz
2.0 x 3
15-Pin D-Sub x 1
2.0 x 1
2.0 X I
9-Pin D-Sub
RJ45 x 2
Android 9.0
Quad core A73
4G 32G
320
2.0 x 1 / 3.0 x 4 / Type-C (DP 1.4 / Data 3.0 / PD:65W)
Stereo Audio Jack (3.5 mm)
Stereo Audio Jack (3.5 mm), S/PDIF
16W x 2
tefore d'Estade Estado
Infrared Touch Frame ±1.0 mm
USB 2.0 x 2 (Type-B)
Windows 2000/XP/Vista/CE 6.0 macOS
Windows 7/8/10/11 Android/Linux (kernel version 3.5+) Chrome OS (39 or above)
macOS (supported by UPDD driver)
AC 100-240V, 50/60 Hz
175W < 0.5W
< 0.5W
Internal
3.2 mm (0.13")
≥ 88%
≥ 8H
75±5 GU
0°C-40°C (32°F-104°F)
10%-90% (non-condensing)
-20°C-60°C (-4°F-140°F)
10%-90% (non-condensing)
Yes (600 x 400 mm)
1499 4 × 906 6 × 109 4 mm (59 6" ×25 2" ×4 2")
1488.4 x 896.6 x 108.4 mm (58.6" x35.3" x4.3") 1488.4 x 896.6 x 85.5 mm (58.6" x35.3" x3.4")
1468.4 x 890.0 x 85.5 mm (58.0 x35.3 x3.4) 1628.0 x 1050.0 x 208.0 mm (64.1" x41.3" x8.2")
36.0 kg (79.4 lb)
36.0 kg (79.4 lb) 37.5 kg (82.7 lb)
37.5 kg (82.7 lb)

Power Cord, HDMI Cable, USB Cable, Remote Control, Batteries, Quick Start Guide, Touch Pen, Wall Mount, Wi-Fi / Bluetooth Module

CMP-01+LMK-01 LMK-01, LMK-03, LMA-02 FMC-03+LMK-04, FMC-04+LMK-04, FMC-05B, FWL-01B, FMC-06











All specifications are subject to change without prior notice. Copyright © 2023 AG Neovo. All rights reserved. The name AG Neovo is a trademark of AIC. All other trademarks are the property of their respective owners. P/C: IF6530 Version 1.2, 20230428

www.agneovo.com