

# DW2701 27-INCH 1440P USB-C MONITOR WITH ERGONOMIC STAND




## FEATURES

- WQHD 1440p Resolution with 16:9 aspect ratio
- USB Type C one-cable connectivity provides up to 65W charging power, video, audio and data transmission
- Full function ergonomic stand, including  $-5^{\circ}$ ~ $20^{\circ}$  tilt,  $45^{\circ}$  swivel,  $90^{\circ}$  pivot and 120mm height adjustment
- IPS-panel ensures the images to be clear in every viewing angle
- 124% NTSC, 113% DCI-P3, 140% sRGB, and 123% AdobeRGB color range
- PiP/PbP multiple windows from different input sources
- Eye Care: Flicker-free and Blue Light Filter technology reduces eye discomfort
- HDMI, DisplayPort and dual 2W speakers for multimedia content
- Compatible with 75 x 75mm VESA mounting standard

The DW2701 27-Inch USB-C monitor is designed to provide a productive workspace for multitasking on a single screen at the office and home. With a one-cable solution, it is easy to connect the laptop or tablet while charging the device, allowing you to start working quickly. In addition, the monitor features 2560 x 1440 resolution, wide viewing angle and richer color performance, delivering crisp and accurate image performance in detail. Its full-function ergonomic stand allows you to build a productive and comfortable working environment for document editing, web design, artwork creation and video production.

## TECHNICAL DRAWING

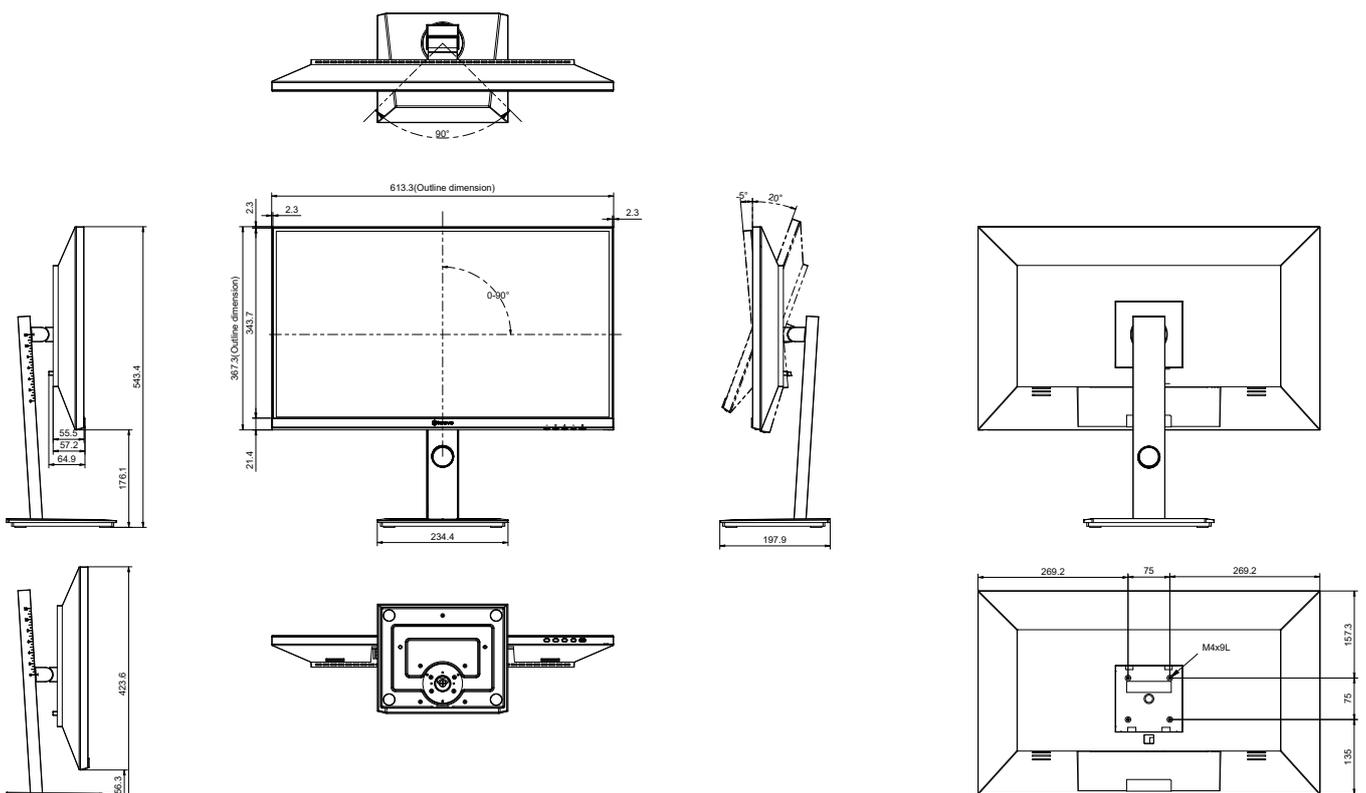

## SPECIFICATIONS

### Panel

Panel Type	LED-Backlit TFT LCD (IPS Technology)
Panel Size	27"
Max. Resolution	WQHD 2560 x 1440
Pixel Pitch	0.233 mm
Brightness	350 cd/m <sup>2</sup>
Contrast Ratio	1000000:1(DCR)
Viewing Angle (H/V)	178°/178°
Display Colour	16.7M
Colour Gamut	sRGB 140% , NTSC 124% , DCI-P3 113% , Adobe RGB 123%
Response Time	5 ms
Surface Treatment	Anti-Glare Treatment (Haze 25%), 3H Hard Coating

### Frequency

Frequency (H)	30 kHz-112 kHz
Frequency (V)	50 Hz-76 Hz

### Signal Input

DisplayPort	1.2 x 1
HDMI	2.0 x 1

### Other Connectivity

USB	Type-C x 1 (PD 65W )
-----	----------------------

### Audio

Audio Out	Stereo Audio Jack (3.5 mm)
Internal Speakers	2W x 2

### Power

Power Supply	Internal
Power Requirements	AC 100-240V, 50/60 Hz 2.0A
On Mode	24W (On)
Standby Mode	< 0.5W
Off Mode	< 0.3W

### Operating Conditions

Temperature	0°C-40°C (32°F-104°F)
Humidity	10%-90% (non-condensing)

### Storage Conditions

Temperature	-20°C-60°C (-4°F-140°F)
Humidity	5%-95% (non-condensing)

### Mounting

VESA FPMPI	Yes (75 x 75 mm)
------------	------------------

### Stand

Tilt	-5° to 20°
Pivot	0° to 90°
Swivel	± 45°
Height Adjustment	0-120 mm

### Dimensions

Product with Base (W x H x D)	613.3 x 543.4 x 197.9 mm (24.2" x 21.4" x 7.8")
Product w/o Base (W x H x D)	613.3 x 367.3 x 57.2 mm (24.2" x 14.5" x 2.3")
Packaging (W x H x D)	920.0 x 457.0 x 168.0 mm (36.2" x 18.0" x 6.6")

### Weight

Product with Base	6.0 kg (13.2 lb)
Product w/o Base	4.0 kg (8.8 lb)
Packaging	8.8 kg (19.4 lb)

### Regulation Approval

Certifications & Compliance	CE, LVD, WEEE, RoHS, REACH, UKCA, FCC, ICES-003 Issue 7
-----------------------------	---

### Accessories

Supplied	HDMI Cable, Power Cord, Quick Start Guide, Screw Stud, USB-C Cable
----------	--

### Optional Accessories

Desk mount	DMC-01, ES-02
Wall Mount	PMK-01, WMA-01, WMK-01



All specifications are subject to change without prior notice.  
Copyright © 2026 AG Neovo. All rights reserved.  
The name AG Neovo is a trademark of AIC.  
All other trademarks are the property of their respective owners.  
P/C: DW2710 Version 3.0, 20260324