

# EM3401UQC 34-INCH ULTRAWIDE 1440P USB-C MONITOR WITH ERGONOMIC STAND




## FEATURES

- UWQHD 3440 x 1440 Resolution with 21:9 aspect ratio
- USB Type C one-cable connectivity provides up to 65W charging power, video, audio and data transmission
- Full function ergonomic stand, including  $-5^{\circ}$ ~ $15^{\circ}$  tilt,  $30^{\circ}$  swivel and 120mm height adjustment
- IPS-panel ensures the images to be clear in every viewing angle
- 110% NTSC, 100% DCI-P3, 130% sRGB, and 110% AdobeRGB color range
- HDR400 Ready
- PiP/PbP multiple windows from different input sources
- Eye Care: Flicker-free and Blue Light Filter technology reduces eye discomfort
- Dual HDMI, DisplayPort and speakers for multimedia content
- Compatible with 100 x 100mm VESA mounting standard

The EM3401UQC 34-Inch USB-C monitor is designed to provide a productive workspace for multitasking on a single screen at the office and home. With a one-cable solution, it is easy to connect the laptop or tablet while charging the device, allowing you to start working quickly. In addition, the monitor features 3440 x 1440 UWQHD resolution with a 21:9 ultrawide aspect ratio, wide viewing angle and richer color performance, delivering crisp and accurate image performance in detail. Its full-function ergonomic stand allows you to build a productive and comfortable working environment for document editing, web design, artwork creation and video production.

## TECHNICAL DRAWING

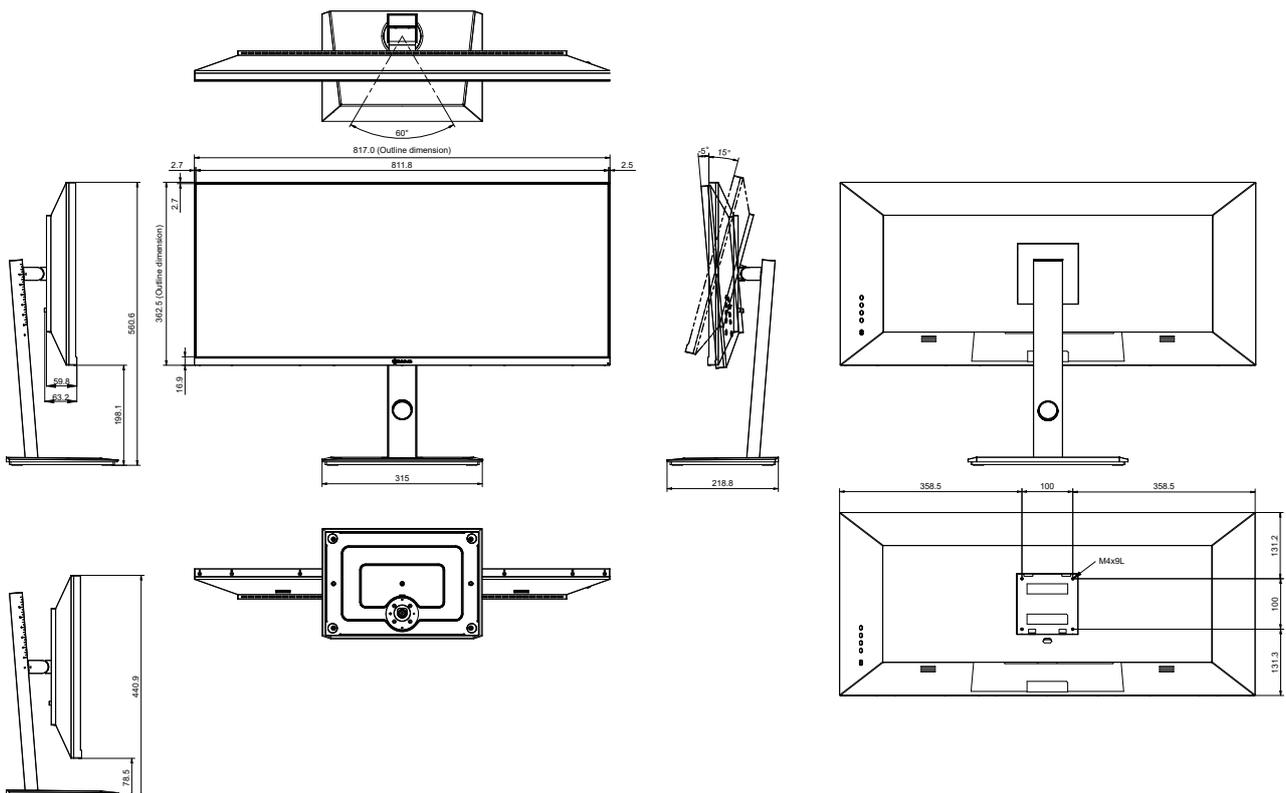

## SPECIFICATIONS

### Panel

Panel Type	LED-Backlit TFT LCD (IPS Technology)
Panel Size	34"
Max. Resolution	UWQHD 3440 x 1440
Pixel Pitch	0.233 mm
Brightness	350 cd/m <sup>2</sup>
Contrast Ratio	1000000:1(DCR)
Viewing Angle (H/V)	178°/178°
Display Colour	16.7M
Colour Gamut	sRGB 130% , NTSC 110% , DCI-P3 100% , Adobe RGB 110%
Response Time	5 ms
Surface Treatment	Anti-Glare Treatment (Haze 25%), 3H Hard Coating

### Frequency

Frequency (H)	30 kHz-112 kHz
Frequency (V)	50 Hz-76 Hz

### Signal Input

DisplayPort	1.2 x 1
HDMI	2.0 x 1 ; 1.4 x 1

### Other Connectivity

USB	Type-C x 1 (PD 65W )
-----	----------------------

### Audio

Audio Out	Stereo Audio Jack (3.5 mm)
Internal Speakers	2W x 2

### Power

Power Requirements	AC 100-240V, 50/60 Hz 2.5A
On Mode	31W (On)
Standby Mode	< 0.5W
Off Mode	< 0.3W
Power Supply	Internal

### Operating Conditions

Temperature	0°C-40°C (32°F-104°F)
Humidity	10%-90% (non-condensing)

### Storage Conditions

Temperature	-20°C-60°C (-4°F-140°F)
Humidity	5%-95% (non-condensing)

### Mounting

VESA FPM/PMI	Yes (100 x 100 mm)
--------------	--------------------

### Stand

Tilt	-5° to 15°
Pivot	N/A
Swivel	± 30°
Height Adjustment	0-120 mm

### Dimensions

Product with Base (W x H x D)	817.0 x 560.6 x 218.8 mm (32.2" x 22.1" x 8.6")
Product w/o Base (W x H x D)	817.0 x 362.5 x 59.8 mm (32.2" x 14.3" x 2.4")
Packaging (W x H x D)	960.0 x 505.0 x 218.0 mm (37.8" x 19.9" x 8.6")

### Weight

Product with Base	11.1 kg ( 24.5 lb)
Product w/o Base	7.6 kg ( 16.8 lb)
Packaging	14.5 kg (32.0 lb)

### Regulation Approval

Certifications & Compliance	CE, LVD, WEEE, RoHS, REACH, UKCA, FCC, ICES 003
-----------------------------	---

### Accessories

Supplied	HDMI Cable, Power Cord, Quick Start Guide, Screw Stud, USB-C Cable
----------	--

### Optional Accessories

Desk mount (Landscape only)	DMC-01, ES-02
Wall Mount (Landscape only)	PMK-01, WMA-01, WMK-01, WMK-03

