

# SC-2202 22" VIDEO SURVEILLANCE MONITOR WITH BNC




## FEATURES

- 1920 x 1080 resolution and wide viewing angle
- HDMI, VGA, Composite (BNC) and dual 2W speakers
- Anti-Burn-in™ technology prevents image ghosting
- Image Enhancer: 3D Comb Filter / Deinterlace / Noise Reduction
- BNC passive loop-through output port
- Black-level adjustment for presenting more details in dark images
- Selectable gamma curves optimise the overall image quality
- CCTV picture mode for maximum image detail and clarity in low light footage
- Designed for continuous 24/7 operation
- Flicker-free display technology reduces eye discomfort



The SC-2202 is a 22-inch security monitor specifically designed for surveillance operators - especially those with a 24/7 operating for efficient video monitoring. The SC-2202 provides value-added video enhancement controls that help create detailed images for low-light footage. Its optional monitor mounting solutions support single or multiple monitor setups. In terms of cost-to-performance, this model is the solution for productivity in modern operator workstations.

## TECHNICAL DRAWING

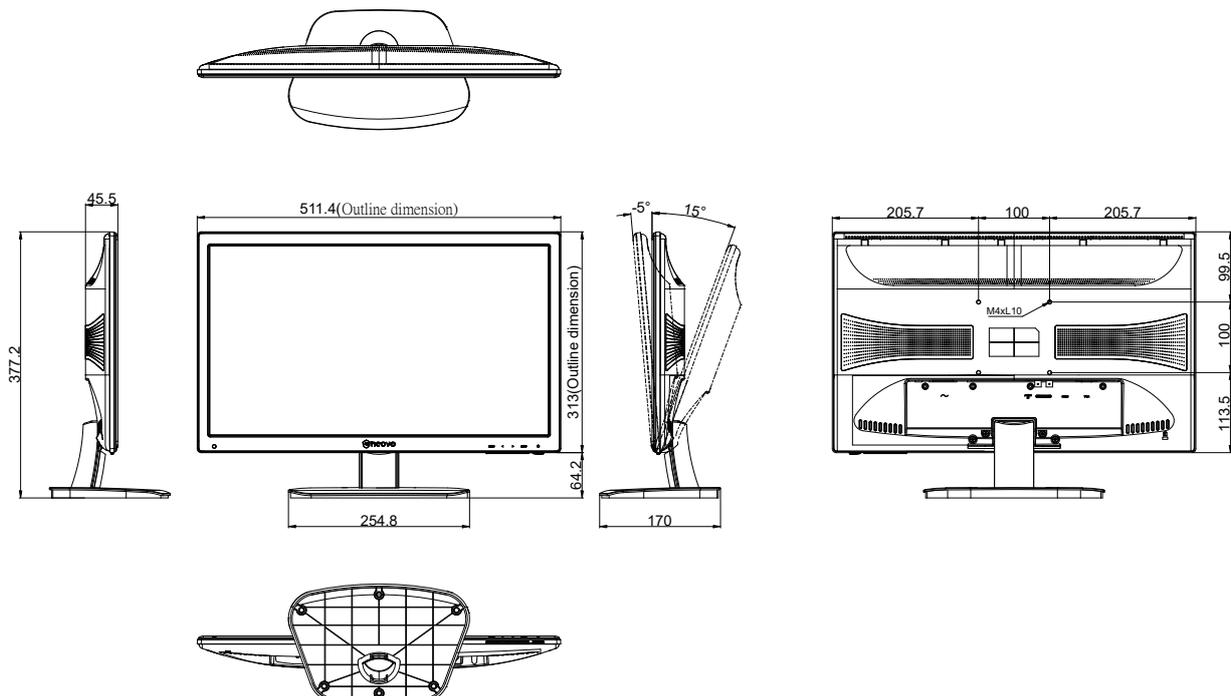

## SPECIFICATIONS

### Panel

Panel Type	LED-Backlit TFT LCD
Panel Size	21.5"
Max. Resolution	FHD 1920 x 1080
Pixel Pitch	0.248 mm
Brightness	250 cd/m <sup>2</sup>
Contrast Ratio	20,000,000:1 (DCR)
Viewing Angle (H/V)	170°/160°
Display Colour	16.7M
Response Time	3 ms

### Frequency

Frequency (H)	30 kHz-85 kHz
Frequency (V)	48 Hz-75 Hz

### Signal Input

HDMI	1.4 x 1
VGA	15-Pin D-Sub x 1
Composite	BNC x 1

### Signal Output

Composite	BNC x 1
-----------	---------

### Audio

Audio In	Stereo Audio Jack (3.5 mm)
Internal Speakers	2W x 2

### Power

Power Supply	Internal
Power Requirements	AC 100-240V, 50/60 Hz
On Mode	16W (On)
Standby Mode	< 0.5W
Off Mode	< 0.3W

### Operating Conditions

Temperature	5°C-35°C (41°F-95°F)
Humidity	20%-85% (non-condensing)

### Storage Conditions

Temperature	-20°C-60°C (-4°F-140°F)
Humidity	10%-90% (non-condensing)

### Mounting

VESA FPMPI	Yes (100 x 100 mm)
------------	--------------------

### Stand

Tilt	-5° to 15°
------	------------

### Security

Kensington Security Slot	Yes
--------------------------	-----

### Dimensions

Product with Base (W x H x D)	511.4 x 377.2 x 170.0 mm (20.1" x 14.9" x 6.7")
Product w/o Base (W x H x D)	511.4 x 313.0 x 45.5 mm (20.1" x 12.3" x 1.8")
Packaging (W x H x D)	561.0 x 426.0 x 103.0 mm (22.1" x 16.8" x 4.1")

### Weight

Product w/o Base	2.9 kg (6.4 lb)
Product with Base	3.2 kg (7.1 lb)
Packaging	4.6 kg (10.1 lb)

### Regulation Approval

Certifications & Compliance	CE, LVD, WEEE, RoHS, REACH
-----------------------------	----------------------------

### Accessories

Supplied	Power Cord, VGA Cable, Audio Cable, Quick Start Guide
----------	---

### Optional Accessories

Ceiling Mount	CMP-01+WMK-03
Wall Mount	WMA-01, WMK-01, WMK-03, PMK-01
Desk mount	DMC-01, DMC-02D, DMS-01D, ES-02

