

label 料号: label Part NO.:

版本号Version NO.

A B C

客户
Customer

型号
Model

销向
Sales Area

EU

材质Material:

包装方式Packing style:

卷状 片状
Coil Piece

安规签核Safety parts:

Yes No

内销中文字体要求高度1.8mm以上

Yes No


颜色标注Color Mark

针对带有UL logo的标签, 其厂家须在最小包装上标示UL Recognized Component Mark  公司名称, 型号及 UL file no.

版本变更说明:


Version Changed Description:

备注Remark:

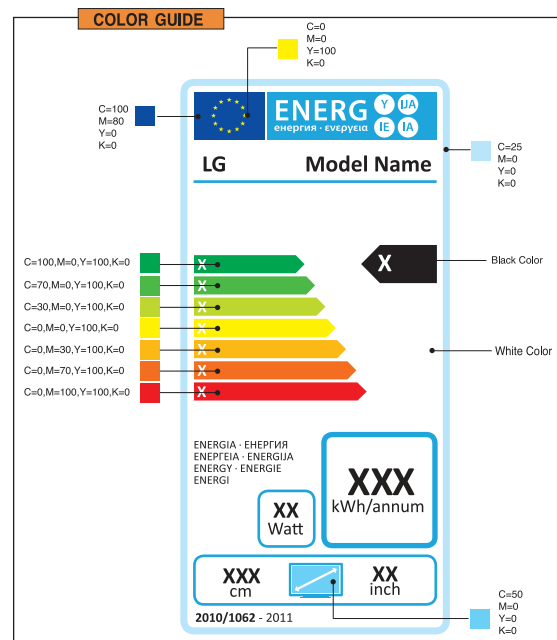

NOTE:

- 1.印刷如上图
Printing as the drawing
- 2.尺寸: 具体见上图所示(公差: +/-0.2mm).
Dimension: as the above drawing (Tolerance: +/-0.2mm).
- 3.材质: 50#PET (背面覆胶, 撕下不可有残胶) 贴附位置: 贴于高亮前框上
- 4.颜色: 如图所示
Color: See the drawing
- 5.Stickiness strength :Cut label into 25mm width ,one end paste on the plate , with 180 ° direction pulling the other end of the tape, the pull is stickiness strength. With stickiness strength instrument for testing.
粘力: 将label切成25mm宽, 一端粘贴于钢板上, 以180°方向的力拉胶带另一端, 所得拉力即为粘力。用粘力测试仪进行测试。
6. The normal temperature test: The range of temperature on plate is -20~100 ° C . In 80 ~100 ° C to maintain 8 hours , the label should not be warp, delamination, frothy and so on. The range of temperature on plastic and carton is -20~65 ° C. In 65 ° C to maintain 8 hours ,the label should not be warp, delamination, frothy and so on.
正常耐温测试: 在钢板上耐温范围为-20~100°C, 在80~100°C保持8小时后不翘角不分层不脱落不起泡等。在塑胶、纸箱上耐温范围为-20~65°C, 在65°C保持8小时后不翘角不分层不脱落不起泡等。
7. Temperature and humidity cycle test : Cycle conditions (stick on texture (PET), stick on texture/carton (art paper): In temperature of -20~60 ° C and humidity of 30~90% to maintain 96 hours , the label should not be warp, delamination, frothy and so on.
耐温湿度循环测试: 循环条件(贴在塑胶咬花面(PET)贴在塑胶咬花面/纸箱(铜板纸)): 温度-20~60°C, 湿度30~90%, 时间 96小时后不翘角不分层不脱落不起泡等。
8. Printing ink can not have overflow and printing color can not be uneven etc.
印刷不可有溢墨及颜色不均等不良现象
9. Packing style: coil and there should be a toothed hole between the link of two pieces
包装方式: 卷状, 连接处打齿孔。
10. The content in the frame printed by the factory barcode group and the specific content provided by SS.
框内内容由厂内打印, 具体内容业务提供。
11. 3mm should be left between the link of two pieces. Around the edge of paper distance is 3mm (公差: +/-0.5mm).
两张连接处距离3mm, 左右边离型纸3mm(公差: +/-0.5mm)。

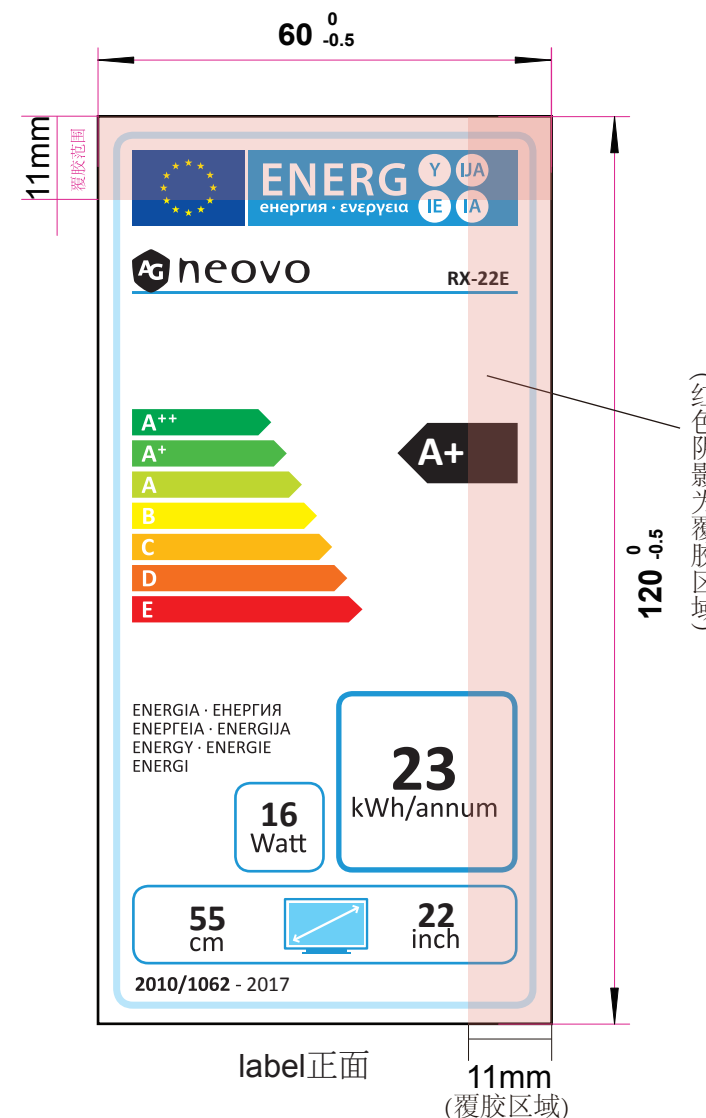

| ADHESION STRENGTH | MATERIAL | | ADHESIVE | PRINTING COLOR |
|--------------------------------|----------|--------------------------|--|-------------------------------|
| | COATING | MATERIAL TYPE | | |
| 2.0 ~ 3.5 Kg.f/cm ² | | Hologram polyester 0.09t | Removable type 可移胶 (HN304 or Equivalent) * Make sure that no adhesive is left after removing the label. You can remove a small amount of adhesive residue 不可有残胶 | 6 Color (C,M,Y,K,Black,White) |