

HMQ-7501 4K SURVEILLANCE DISPLAY WITH SDI




FEATURES

- 4K UHD 3840 x 2160 resolution
- Anti-Burn-in™ technology prevents image ghosting
- Image Enhancer: 3D Comb Filter / Deinterlace / Noise Reduction
- Versatile connectivity: SDI, HDMI, DVI, VGA, Composite (BNC)
- Supports multiple SDI formats: 3G/HD/SD-SDI
- Embedded audio in SDI up to 8 channels of 48kHz
- BNC passive loop-through output port
- RS232/LAN Control - provides compatibility with control systems
- Dark surveillance enhancement with CCTV mode & black-level adjustment
- Selectable gamma curves optimise different kinds of images
- Compatible with Neovo Controller for simultaneous multi-display control
- Optional blue or black screen when no input signal is detected
- Lockable control keys to prevent tampering in public environments
- Commercial-grade panel for high reliability and long product lifetime
- 24/7 Operation with a rugged metal housing design

The HMQ-7501 is a 75-inch 4K LCD display with SDI connectivity, perfect for live video streaming over long distances in broadcasting and monitoring applications. This advanced display technology is future-proof and compatible with both analogue and digital surveillance systems. The HMQ-7501 delivers up to 8MP image quality via an HDMI connection, providing crisp video footage. Its SDI loop-through design enables the display to receive real-time 1080p images from HD-SDI or 3G-SDI cameras and transmit uncompressed video to multiple SDI displays with ultra-low latency. It caters to the demand for high-quality image detail in live video monitoring for broadcasting and video surveillance solutions.

TECHNICAL DRAWING

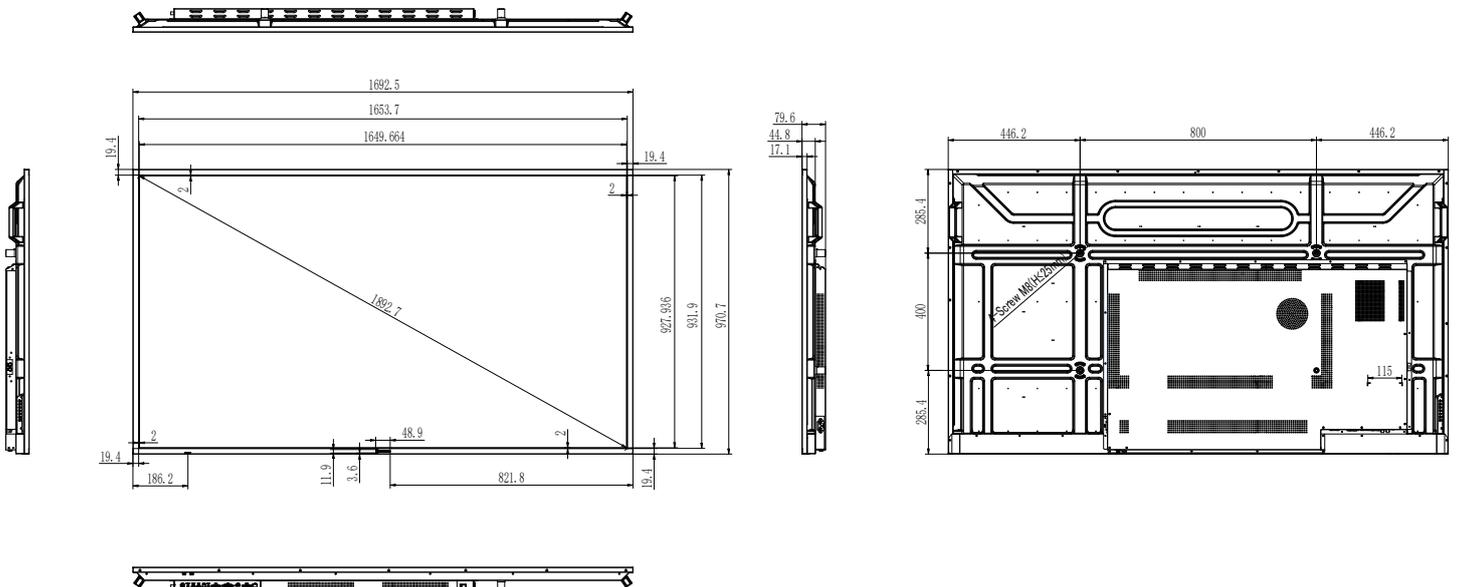

SPECIFICATIONS

Panel	
Panel Type	LED-Backlit TFT LCD (IPS Technology)
Panel Size	75"
Max. Resolution	UHD 3840 x 2160
Pixel Pitch	0.43 mm
Brightness	450 cd/m ²
Contrast Ratio	1200:1
Viewing Angle (H/V)	178°/178°
Display Colour	1.07B
Response Time	5 ms
Surface Treatment	Anti-Glare Treatment (Haze 1%), 3H Hard Coating
Frequency	
Frequency (H)	31 kHz ~ 92 kHz
Frequency (V)	48 Hz ~ 76 Hz
Signal Input	
SDI	BNC x 1
HDMI	2.0 x 1
DVI	24-Pin DVI-D
VGA	15-Pin D-Sub x 1
Composite	BNC x 1
Signal Output	
SDI	BNC x 1
Composite	BNC x 1
External Control	
RS232 In	9-Pin D-Sub
LAN	RJ45 x 1
Other Connectivity	
USB	2.0 x 1 (Service Port)
Audio	
Audio In	Stereo Audio Jack (3.5 mm)
Audio Out	S/PDIF
	Stereo Audio Jack (3.5 mm)
Internal Speakers	15 W x 2
Power	
Power Requirements	AC 100-240V, 50/60 Hz
On Mode	201W (On)
Standby Mode	< 0.5W
Off Mode	< 0.3W
Power Supply	Internal
Operating Conditions	
Temperature	0°C-40°C (32°F-104°F)
Humidity	20%-85% (non-condensing)
Storage Conditions	
Temperature	-10°C-60°C (-4°F-140°F)
Humidity	10%-95% (non-condensing)
Mounting	
VESA FPMPMI	Yes (800 x 400 mm)
Dimensions	
Product w/o Base (W x H x D)	1692.5 x 970.7 x 79.6 mm (66.6" x 38.2" x 3.1")
Packaging (W x H x D)	1900.0 x 1125.0 x 225.0 mm (74.8" x 44.3" x 8.9")
Weight	
Product w/o Base	38.0 kg (83.78 lb)
Packaging	50.0 kg (110.2 lb)
Regulation Approval	
Certifications & Compliance	CE, LVD, WEEE, RoHS, REACH
Accessories	
Supplied	HDMI Cable, Power Cord, Quick Start Guide, Remote Control (Batteries not included)
Optional Accessories	
Floor Mount (Landscape only)	FMC-07
Wall Mount (Landscape only)	LMK-03

