

# NSD-6503 65-INCH ALL-IN-ONE 4K UHD DIGITAL SIGNAGE DISPLAY


## FEATURES



- Ultra HD 3840 x 2160 resolution
- 500 nits brightness panel offers clear images even in well-lit environments.
- 14mm ultra-narrow bezel for a seamless and immersive viewing experience.
- Slim profile of 38.9mm fits closely to the wall, ensuring a sleek, integrated look.
- 25% haze anti-glare for a glare-free viewing experience in any lighting condition.
- Anti-Burn-in™ technology prevents image ghosting.
- Premium commercial-grade panel designed for 24/7 use.
- Flexible display orientation, with landscape and portrait options.
- Android 9.0 & 16GB Storage capacity for apps and media.
- USB media playback directly from USB storage devices quickly and easily.
- Built-in Wi-Fi 5 and Bluetooth options for easy integration into your existing network and connection to peripheral devices.
- Integrated web browser on accessing online content directly from your display.
- Wireless screen sharing without any apps downloaded.
- User-friendly content management system offers an intuitive interface for updating and scheduling content with ease.
- Embedded advanced content scheduling function for easy arrangement of content playback schedule.
- 3 x HDMI ports provide connections to an external media player and a variety of HD sources.
- RS232 & LAN control for incorporation into a managed network for centralized control.
- Compatible with Neovo Controller software across brands and consolidating command codes.

The NSD-6503, a 65-inch 4K Ultra HD all-in-one digital signage display boasting 500 nits brightness, is powered by the Android 9.0 operating system. It provides a one-stop solution for comprehensive content management, facilitating the creation, management, and publishing of eye-catching content. With advanced scheduling and seamless integration of cutting-edge features, it offers versatile connectivity, sleek design, and immersive visuals. This display is ideal for businesses that prioritize customer engagement with timely and visually striking information.

## TECHNICAL DRAWING

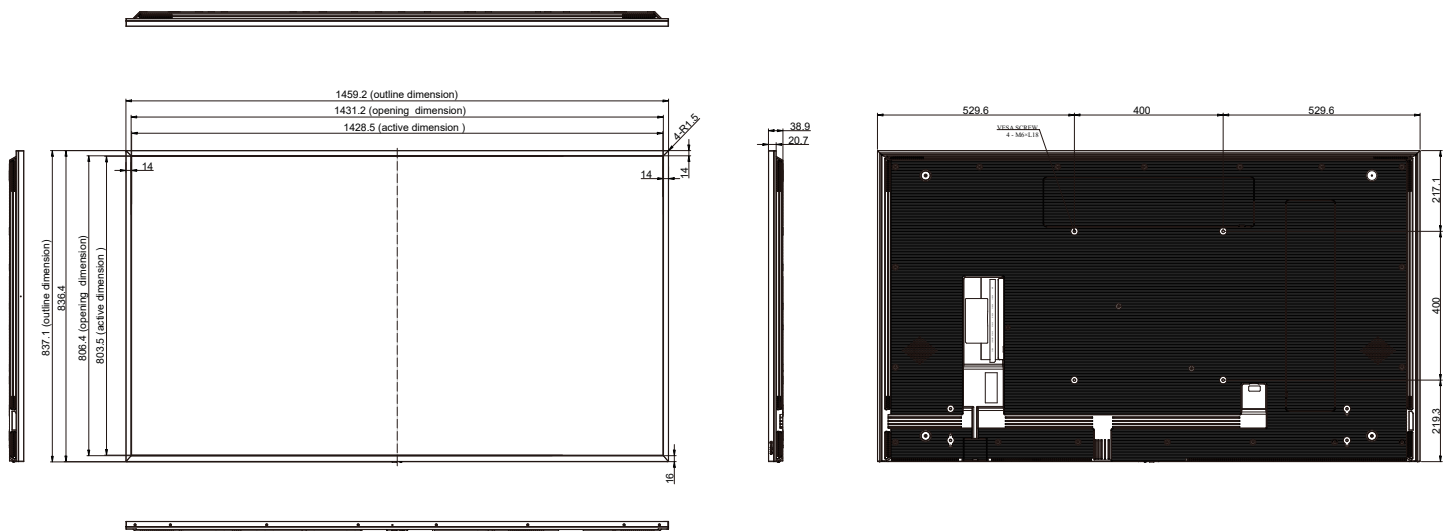

## SPECIFICATIONS

### Panel

Panel Type	LED-Backlit TFT LCD (VA Technology)
Panel Size	64.5"
Max. Resolution	UHD 3840 x 2160
Pixel Pitch	0.372 mm
Brightness	500 cd/m <sup>2</sup>
Contrast Ratio	5000:1
Viewing Angle (H/V)	178°/178°
Display Colour	1.07G
Response Time	5 ms
Surface Treatment	Haze 25% · Hard Coating (3H)

### Frequency

Frequency (H)	18 kHz-135 kHz
Frequency (V)	24 Hz-60 Hz

### Signal Input

HDMI	2.0 x 3
------	---------

### External Control

RS232 In	9-Pin D-Sub
LAN	RJ45 x 1

### Embedded Player

OS	Android 9.0
CPU	A35*4
Memory	2G
Storage	16G

### Other Connectivity

USB	2.0 x 2 (Service Port / Media Playback)
-----	---

### Audio

Audio Out	Stereo Audio Jack (3.5 mm)
Internal Speakers	10W x 2

### Power

Power Supply	Internal
Power Requirements	AC 100-240V, 50/60 Hz
On Mode	101W (On)
On Mode (Max)	150W (Max)
Standby Mode	< 0.5W

### Durability and Protection

IP rating	IP5X
-----------	------

### Operating Conditions

Temperature	0°C-40°C (32°F-104°F)
Humidity	20%-80% (non-condensing)

### Storage Conditions

Temperature	-20°C-60°C (-4°F-140°F)
Humidity	20%-80% (non-condensing)

### Mounting

VESA FPM PMI	400 mm x 400 mm
--------------	-----------------

### Dimensions

Bezel Width	14 mm (Top/Left/Right)
Product w/o Base (W x H x D)	1459.2 x 837.1 x 38.9 mm (57.4" x 33.0" x 1.5")
Packaging (W x H x D)	1640.0 x 990.0 x 164.0 mm (64.6" x 39.0" x 6.5")

### Weight

Product w/o Base	25.3 kg (55.8 lb)
Packaging	33.8 kg (74.5 lb)

### Regulation Approval

Certifications & Compliance	FCC, CE, LVD, ICES-003 Issue 7, WEEE, RoHS, REACH, BSMI
-----------------------------	---

### Accessories

Supplied	HDMI Cable, Power Cord, Quick Start Guide, Remote Control (Batteries not included)
----------	--

### Optional Accessories

Ceiling Mount	CMP-01 + LMK-01
Video Wall Mount	VWM-01, VWM-02
Wall Mount	LMA-01, LMA-02, LMK-01, WMK-04, WMK-05
Wall Mount (Landscape only)	LMK-03
Floor Mount (Landscape only)	FMC-06, FMC-07



All specifications are subject to change without prior notice.

Copyright © 2025 AG Neovo. All rights reserved.

The name AG Neovo is a trademark of AIC.

All other trademarks are the property of their respective owners.

P/C: ND6530 Version 3.1, 20251209