

# DW2702 27-INCH 1440P USB-C DOCKING MONITOR WITH ERGONOMIC STAND




## FEATURES

- Crisp WQHD 2560 x 1440 resolution for clear, detailed visuals.
- USB Type-C one-cable connectivity provides up to 65W charging power, video, audio and data transmission.
- Wide color gamut with 122% sRGB, 105% NTSC, 103% AdobeRGB, and 96% DCI-P3
- Two USB 2.0 Type-A ports for easy peripheral connections.
- RJ45 Ethernet port connects to a wired network and shares it with your laptop via USB Type-C.
- Adjustable tilt, swivel, pivot, and height for comfortable viewing.
- IPS panel delivers clear, accurate images from any angle.
- Wide color gamut for vibrant, true-to-life colors.
- HDR: HDR400 readiness enhances viewing with greater color, contrast and brightness levels.
- Eye care features, including Flicker-Free and Blue Light Filter, reduce eye strain.
- Multiple connections, including HDMI, DisplayPort 1.4, and USB Type-C.
- Built-in 2W x 2 speakers for convenient audio.
- 100 x 100 mm VESA mount support for flexible installation.

The DW2702 is a versatile 27-inch monitor built to boost productivity in both office and home settings. Its WQHD 2560 x 1440 resolution delivers sharp image clarity, ideal for everything from document editing to creative design. USB Type-C connectivity enables power, video, audio, and data transfer through a single cable, with additional USB Type-A and RJ45 ports for enhanced connectivity. The built-in Ethernet port provides a stable internet connection when linked to your laptop via USB Type-C. The ergonomic design, with adjustable tilt, swivel, pivot, and height, ensures all-day comfort. With eye care features and a wide color gamut, the DW2702 is designed for modern professionals.

## TECHNICAL DRAWING

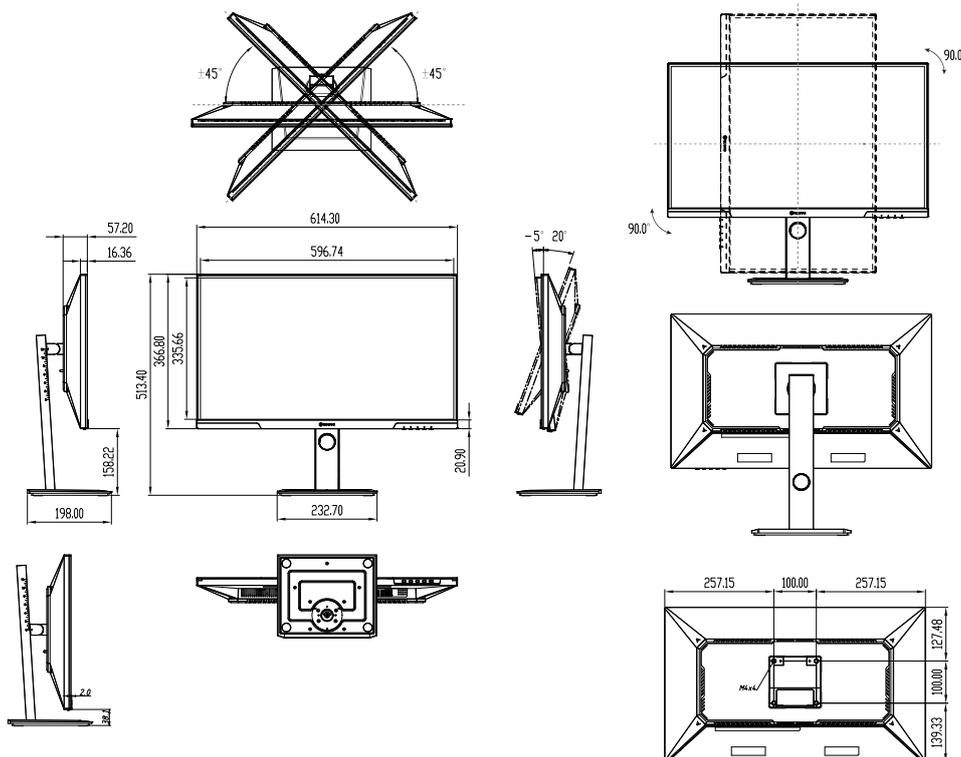

## SPECIFICATIONS

<b>Panel</b>	
Panel Type	LED-Backlit TFT LCD (IPS Technology)
Panel Size	27"
Max. Resolution	WQHD 2560 x 1440
Pixel Pitch	0.233 mm
Brightness	350 cd/m <sup>2</sup>
Contrast Ratio	1,000,000:1(DCR)
Viewing Angle (H/V)	178°/178°
Display Colour	16.7M
Response Time	5 ms
Surface Treatment	Anti-Glare Treatment (Haze 25%), 3H Hard Coating
<b>Frequency</b>	
Frequency (H)	31 KHz-146 kHz
Frequency (V)	48 Hz-100 Hz
<b>Signal Input</b>	
DisplayPort	1.4 x 1
HDMI	2.0 x 1
Type-C	x1 (PD 65W )
<b>External Control</b>	
RJ45	x1
<b>Other Connectivity</b>	
USB	Type-A 2.0 x 2
<b>Audio</b>	
Audio Out	Stereo Audio Jack (3.5 mm)
Internal Speakers	2W x 2
<b>Power</b>	
Power Supply	External
Power Requirements	DC 24V, 5A
On Mode	22W (On)
Standby Mode	< 0.5W
Off Mode	< 0.3W
<b>Operating Conditions</b>	
Temperature	0°C-40°C (32°F-104°F)
Humidity	10%-90% (non-condensing)
<b>Storage Conditions</b>	
Temperature	-20°C-60°C (-4°F-140°F)
Humidity	5%-95% (non-condensing)
<b>Mounting</b>	
VESA FPM/PMI	Yes (100 x 100 mm)
<b>Stand</b>	
Tilt	-5° to 20°
Pivot	0° to 90°
Swivel	± 45°
Height Adjustment	0-120 mm
<b>Dimensions</b>	
Product with Base (W x H x D)	614.3 x 513.4 x 198.0 mm (24.2" x 20.2" x 7.8")
Product w/o Base (W x H x D)	614.3 x 366.8 x 57.2 mm (24.2" x 14.4" x 2.3")
Packaging (W x H x D)	861.0 x 460.0 x 170.0 mm (33.9" x 18.1" x 6.7")
<b>Weight</b>	
Product with Base	5.7 kg (12.6 lb)
Product w/o Base	3.7 kg (8.2 lb)
Packaging	7.5 kg (16.5 lb)
<b>Regulation Approval</b>	
Certifications & Compliance	CE, LVD, RoHS, WEEE, REACH, UKCA
<b>Accessories</b>	
Supplied	Power Adaptor, Power Cord, HDMI Cable, Quick Start Guide, USB-C Cable
<b>Optional Accessories</b>	
Desk mount	DMC-01, ES-02
Wall Mount	PMK-01, WMA-01, WMK-01, WMK-03



All specifications are subject to change without prior notice.  
Copyright © 2026 AG Neovo. All rights reserved.  
The name AG Neovo is a trademark of AIC.  
All other trademarks are the property of their respective owners.  
P/C: DW2720 Version 2.0, 20260324