


VA4301 43-INCH 4K UHD SLIM BEZEL DIGITAL SIGNAGE DISPLAY

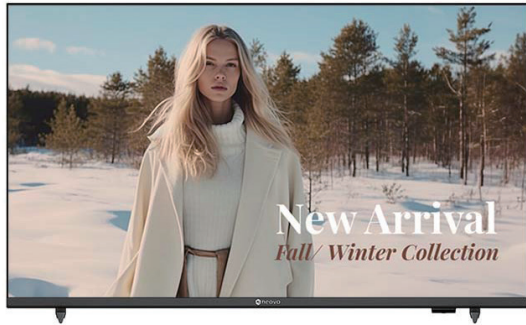


FEATURES

- **4K Ultra HD Resolution:** Sharp, detailed visuals for impactful presentations.
- **Slim Bezel Design:** Sleek and modern look for seamless integration into spaces.
- **Multiple HDMI Inputs:** 3 HDMI inputs for easy connection to various devices.
- **Alink™ Function:** Synchronized powering on/off via HDMI.
- **Improved Viewing Experience:** Ensure consistent image quality for multiple viewers.
- **Anti Burn in™ Technology:** Prevents image ghosting.
- **Automate Playback with Scheduling Function:** Ensuring targeted messages reach audiences at the right moment.
- **Compatible with Neovo Controller Software:** Easily manage multiple displays simultaneously with an intuitive and user-friendly interface.

The VA4301 delivers sharp, detailed visuals with a modern, sleek design that seamlessly fits into retail, corporate, and public spaces. With three HDMI inputs, it supports multiple media sources for dynamic content. A wide viewing angle ensures clear visibility from all perspectives, while Anti Burn-in™ Technology prevents image ghosting for long-term reliability. Compatible with Neovo Controller Software, it enables effortless multi-display management. Ideal for impactful digital signage.

TECHNICAL DRAWING

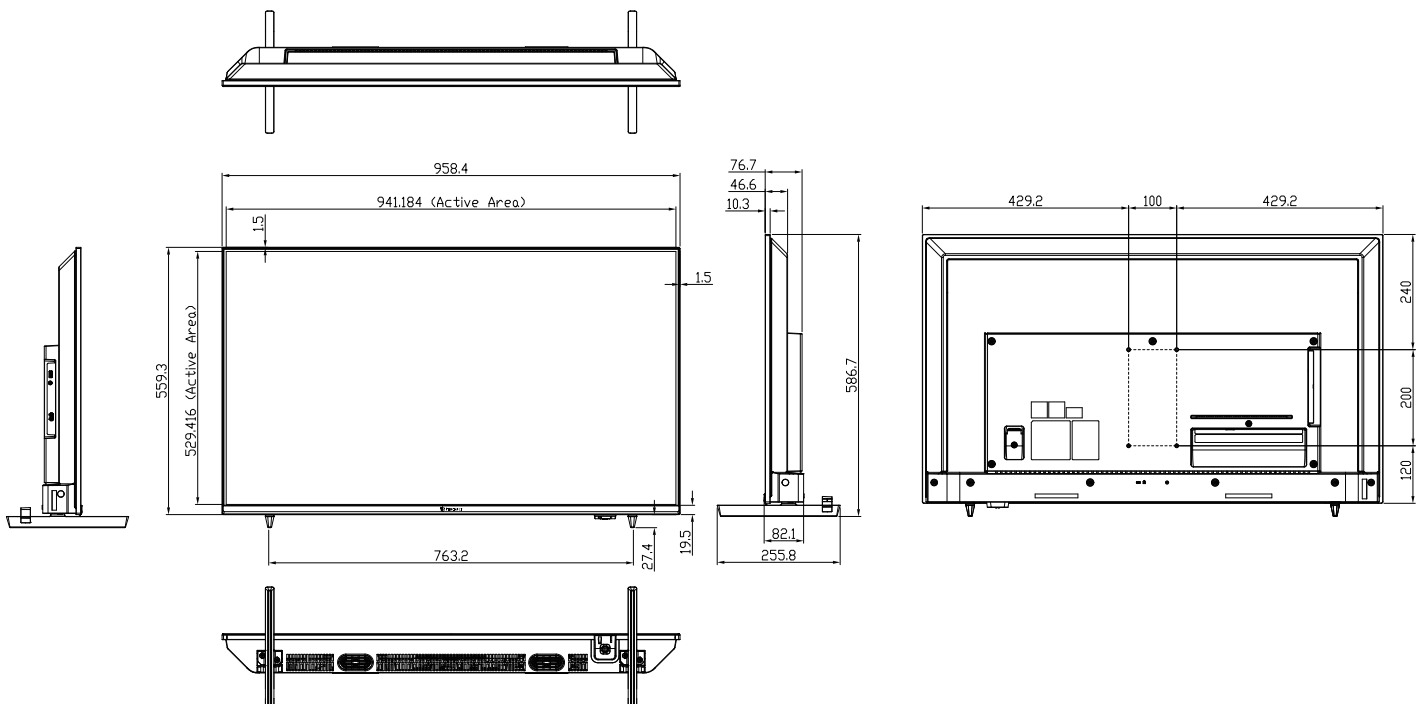

SPECIFICATIONS

Panel

Panel Type	LED-Backlit TFT LCD (IPS Technology)
Panel Size	42.5"
Max. Resolution	UHD 3840 x 2160
Pixel Pitch	0.245 mm
Brightness	350 cd/m ²
Contrast Ratio	1200:1
Viewing Angle (H/V)	178°/178°
Display Colour	1.07G
Response Time	5 ms
Surface Treatment	Anti-Glare Treatment (Haze 1%), 3H Hard Coating

Frequency

Frequency (H)	31 kHz-136 kHz
Frequency (V)	29 Hz-61 Hz

Signal Input

HDMI	2.0 x 3
------	---------

External Control

RS232 In	9-Pin D-Sub
----------	-------------

Other Connectivity

USB	2.0 x 1 (Service Port / Media Playback)
-----	---

Audio

Audio Out	Stereo Audio Jack (3.5 mm)
Internal Speakers	5W x 2

Power

Power Supply	Internal
Power Requirements	AC 100-240V, 50/60 Hz
On Mode	54W (On)
Standby Mode	< 0.5W

Operating Conditions

Temperature	0°C-40°C (32°F-104°F)
Humidity	20%-80% (non-condensing)

Storage Conditions

Temperature	-20°C-60°C (-4°F-140°F)
Humidity	10%-90% (non-condensing)

Mounting

VESA FPMPI	Yes (100 x 200 mm)
------------	--------------------

Security

Kensington Security Slot	Yes
--------------------------	-----

Dimensions

Product w/o Base (W x H x D)	958.4 x 568.5 x 76.7 mm (37.7" x 22.4" x 3.0")
Product with Base (W x H x D)	958.4 x 586.7 x 255.8 mm (37.7" x 23.1" x 10.1")
Packaging (W x H x D)	1070 x 650 x 140 mm (42.1" x 25.6" x 5.5")

Weight

Product w/o Base	7.2 Kg (15.9 lbs)
Product with Base	7.3 Kg (16.1 lbs)
Packaging	9.9 Kg (21.8 lbs)

Regulation Approval

Certifications & Compliance	CE, LVD, UKCA, WEEE, RoHS, REACH, EAC
-----------------------------	---------------------------------------

Accessories

Supplied	HDMI Cable, Power Cord, Quick Start Guide, Remote Control (Batteries not included)
----------	--

Optional Accessories

Ceiling Mount (Landscape only)	CMP-01 + LMK-01, CMP-01 + LMK-02, CMP-01 + WMK-03
Desk mount (Landscape only)	DTS-01
Wall Mount (Landscape only)	LMK-01, LMK-02, WMK-03, LMA-02

