

PB3701 37-INCH STRETCHED DISPLAY




FEATURES

- **Native 37" Panel Display:** Specifically manufactured panel ensures superior quality and durability.
- **700 nits High Brightness and Anti-Glare Panel:** Provides clear visibility in bright indoor environments.
- **Ultra Wide 32:9 Aspect Ratio:** Built to fit narrow spaces and panoramic content.
- **Compact and Versatile Design:** Slim design fits narrow spaces, supports landscape and portrait installation.
- **Wide Viewing Angle:** Ensures consistent image quality for multiple viewers.
- **Anti-Burn in™ Technology:** Prevents image ghosting for reliable long-term performance.
- **Compatible with Neovo Controller Software:** Easily control multiple displays simultaneously via RS232/LAN

The PB3701 features a native 37" panel for premium image quality and durability, paired with an ultra-wide 32:9 aspect ratio and slim, compact design that fits perfectly in narrow spaces. With 700 nits brightness and an anti-glare coating, it ensures excellent visibility in bright indoor environments. The display supports landscape and portrait installation, offers a wide viewing angle for consistent clarity, and includes Anti-Burn-in™ Technology to prevent ghosting and maintain long-term performance.

TECHNICAL DRAWING

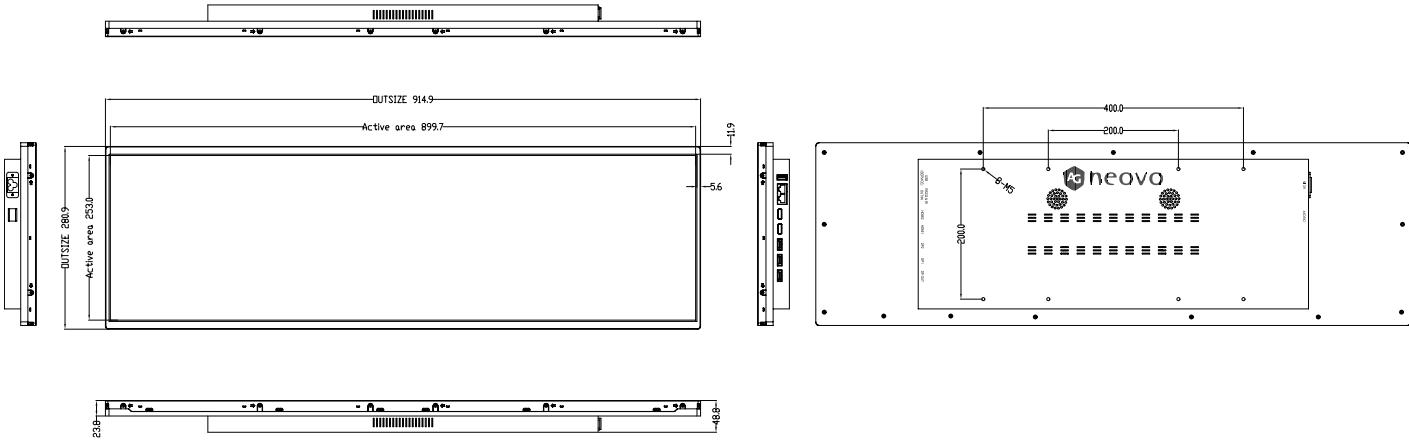

SPECIFICATIONS

Panel

Panel Type	LED-Backlit TFT LCD (IPS Technology)
Panel Size	37"
Max. Resolution	1920 x 540
Pixel Pitch	0.469 mm
Brightness	700 cd/m ²
Contrast Ratio	1000 : 1
Viewing Angle (H/V)	178°/178°
Display Colour	16.7M
Response Time	5 ms
Surface Treatment	Anti-Glare Treatment (Haze 25%), 3H Hard Coating


Frequency

Frequency (H)	30 kHz-81 kHz
Frequency (V)	56 Hz-76 Hz

Signal Input

DisplayPort	1.2 x 2
HDMI	2.0 x 2

Signal Output

DisplayPort	x 1
-------------	-----

External Control

IR/RS232 In	RJ45 x1
IR/RS232 Out	RJ45 x1

Other Connectivity

USB	2.0 x 1 (Service Port)
-----	------------------------

Audio

Internal Speakers	5 W x 2
-------------------	---------

Power

Power Supply	Internal
Power Requirements	AC 100-240V, 50/60 Hz
On Mode	24W(On)
Standby Mode	<0.5W
Off Mode	0W

Operating Conditions

Temperature	0°C-40°C (32°F-104°F)
Humidity	10%-90% (non-condensing)

Storage Conditions

Temperature	-20°C-60°C (-4°F-140°F)
Humidity	5%-95% (non-condensing)

Mounting

VESA FPM PMI	Yes (400 x 200 & 200 x 200 mm)
--------------	--------------------------------

Dimensions

Bezel Width	11.9 mm (Top/Bottom) 5.6 mm (Left/Right)
Product w/o Bracket (W x H x D)	914.9 x 280.9 x 48.8 mm (36.0" x 11.1" x 1.9")
Packaging (W x H x D)	1000.0 x 380.0 x 115.0 mm (39.4" x 15.0" x 4.5")

Weight

Product w/o Base	7.2 Kg (15.9 lb)
Packaging	9.6 Kg (21.2lb)

Regulation Approval

Certifications & Compliance	CE, LVD, WEEE, RoHS, REACH, EAC, UKCA
-----------------------------	---------------------------------------

Accessories

Supplied	Power Cord, Remote Control (Batteries not included), IR Sensor, Quick Start Guide
----------	---

Optional Accessories

Ceiling Mount	CMP-01 + WMK-03
Wall Mount	WMK-03



All specifications are subject to change without prior notice.

Copyright © 2025 AG Neovo. All rights reserved.

The name AG Neovo is a trademark of AIC.

All other trademarks are the property of their respective owners.

P/C: PB3710 Version 2.0, 20251003