

X-2202 22" INDUSTRIAL-GRADE MONITORS WITH IK10 METAL CASING




FEATURES

- Full HD 1920 x 1080 Resolution
- Anti-Burn-in™ Technology prevents image ghosting
- Front-sided NeoV™ Optical Glass screen meets IP65 Compliant
- With an IK-10 rated metal casing to withstand physical impacts
- Wide temperature range perform consistently in various environments
- Meet light industrial certification standards EN61000-6-1 & EN61000-6-3
- Versatile connectivity: VGA, DVI, HDMI and DisplayPort inputs
- EcoSmart Sensor automatically adjusts brightness level to save energy
- Picture-in-picture and Picture-by-picture for multitasking efficiency

The AG Neovo X-2202 industrial monitor is a testament to a legacy of premium design and innovative technology, now redefined to deliver unparalleled resilience and performance in the most demanding industrial settings. This meticulously engineered 22" monitor surpasses the diverse visual requirements of contemporary industrial environments, ensuring reliability and excellence in every application. Its robust build is perfect for scenarios ranging from manufacturing plants and laboratories to automotive workshops and food & beverage processing facilities, making the X-2202 an ideal choice for professionals seeking unmatched clarity and durability.

TECHNICAL DRAWING

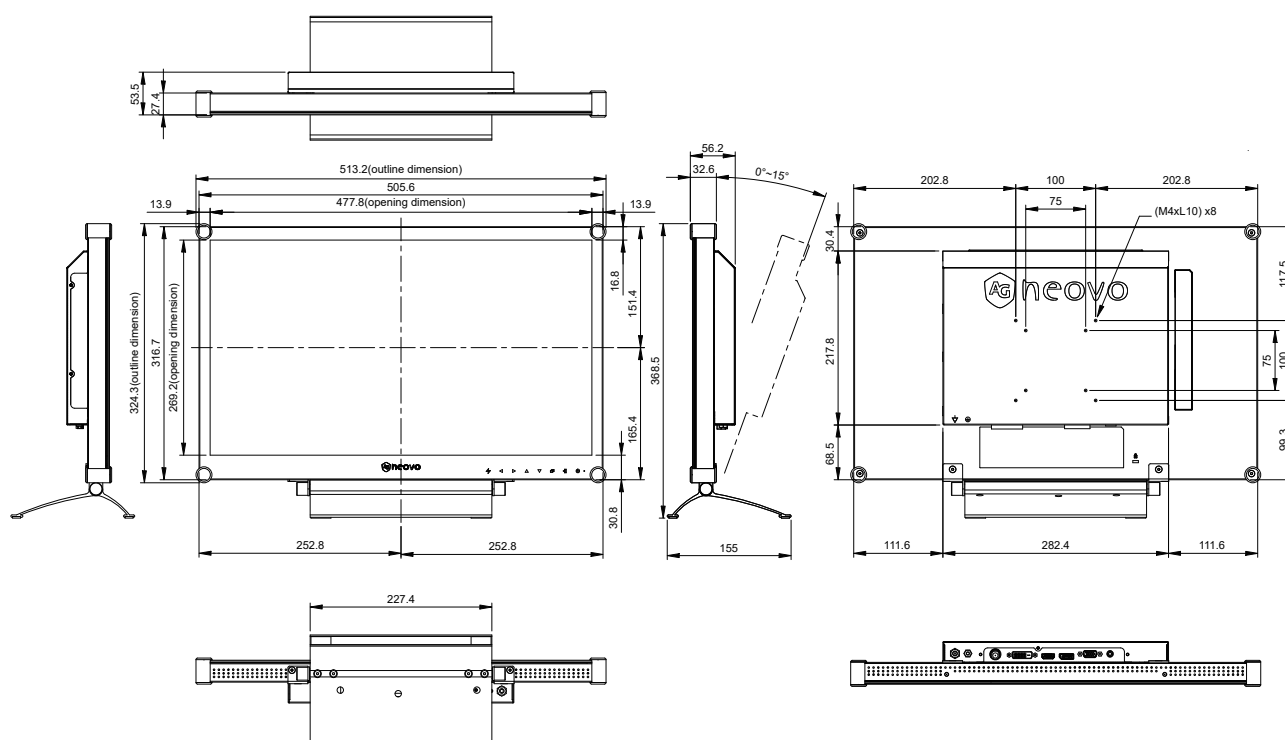

SPECIFICATIONS

Panel	
Panel Type	LED-Backlit TFT LCD (IPS Technology)
Panel Size	21.5"
Max. Resolution	FHD 1920 x 1080
Pixel Pitch	0.248 mm
Brightness	250 cd/m ²
Contrast Ratio	20,000,000:1 (DCR)
Viewing Angle (H/V)	178°/178°
Display Colour	16.7M
Response Time	5 ms
Frequency	
Frequency (H)	24 kHz-83 kHz
Frequency (V)	50 Hz-75 Hz
Signal Input	
DisplayPort	x 1
HDMI	1.4 x 1
DVI	24-Pin DVI-D
VGA	15-Pin D-Sub x 1
Audio	
Audio In	Stereo Audio Jack (3.5 mm)
Internal Speakers	2W x 2
Power	
Power Supply	External
Power Requirements	DC 12V, 3.33A
On Mode	20W (On)
Standby Mode	< 0.5W
Off Mode	< 0.3W
Glass	
Surface Treatment	AR
Thickness	3.0 mm (0.12")
Reflection Rate	< 1%
Transmission Rate	> 97%
MOHS Hardness	6
Pencil Hardness	9H
IK Rating	IK07
Durability and Protection	
IP Rating	Front-Sided IP65
IK Rating	IK10 (Metal casing)
Operating Conditions	
Temperature	0°C-40°C (32°F-104°F)
Humidity	10%-90% (non-condensing)
Storage Conditions	
Temperature	-20°C-60°C (-4°F-140°F)
Humidity	5%-95% (non-condensing)
Mounting	
VESA FPM/PMI	Yes (100 x 100 mm & 75 x 75 mm)
Stand	
Tilt	0° to 15°
Security	
Kensington Security Slot	Yes
Dimensions	
Product with Base (W x H x D)	513.2 x 368.5 x 155.0 mm (20.2" x 14.5" x 6.1")
Product w/o Base (W x H x D)	513.2 x 324.3 x 56.2 mm (20.2" x 12.8" x 2.2")
Packaging (W x H x D)	614.0 x 477.0 x 204.0 mm (24.2" x 18.8" x 8.0")
Weight	
Product with Base	6.7 kg (14.7 lb)
Product w/o Base	6.2 kg (13.7 lb)
Packaging	8.8 kg (19.4 lb)
Regulation Approval	
Certifications & Compliance	CE, LVD, RoHS, WEEE, REACH, UKCA, EN 50130-4, EN IEC 61000-6-3, EN IEC 61000-6-1
Accessories	
Supplied	Audio Cable, Power Adaptor, Power Cord, Quick Start Guide, VGA Cable
Optional Accessories	
Handle	HDL-02
Desk mount (Landscape only)	DMC-01, DMC-02D, DMS-01D, ES-02



All specifications are subject to change without prior notice.
Copyright © 2026 AG Neovo. All rights reserved.
The name AG Neovo is a trademark of AIC.
All other trademarks are the property of their respective owners.
P/C: X22200 Version 3.1, 20260508