

# RX-Series LCD Display 32" | 42" | 55"

## Raise the Bar for Security



With its specialised gamma selection, the enhanced RX-Series renders images of the highest quality even under unfavourable lighting conditions. The RX-Series is built to last and perform in 24/7 security and surveillance environments. Its durability is enhanced by AG Neovo's Anti-Burn-in™ technology, which prevents ghosting while performing nonstop mission-critical operations; NeoV™ Optical Glass and metal casing shield it from scratches or other damages.




RX-32E

RX-55E / RX-42E




RX-55E / RX-42E

RX-32E

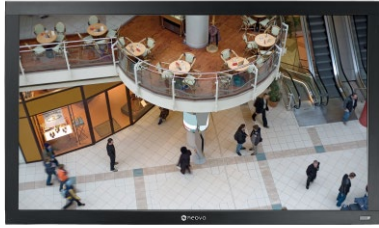

### Enhanced Gamma Selection

Selectable gamma curves visually optimise different kinds of images. The AG Neovo specialised image settings enhance colour, brightness, sharpness and contrast ratio, allowing the RX-Series to improve the light, shadows and colour balance of videos.

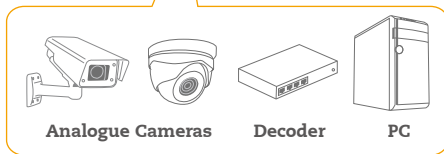

### Smart Power Management

Power management is an important consideration for 24/7 applications to ensure a long product life and extended use. The RX-Series designed an energy saving EcoSmart Sensor, so the display can automatically adjust its brightness according to the external environment.



### Features

- Full HD 1920 x 1080 resolution
- Anti-Burn-in™ technology prevents image ghosting
- NeoV™ Optical Glass and metal housing for excellent cleanability and protection
- Image enhancer: 3D Comb Filter / Deinterlace / Noise Reduction
- Adjustable image settings via analogue inputs
- Versatile connectivity: DisplayPort, HDMI, DVI, VGA, Component/Composite
- Built-in USB media player for simple signage content delivery
- An integrated scheduler allows content programming based on time and day
- DMR function: play media shared over a local network
- DisplayPort, HDMI, DVI, VGA, BNC, RS232, IR daisy chain support
- RJ45, RS232, IR device control support

### Industry-leading Reliability

The RX-Series is specially designed to transcend the challenge of enduring 24/7 operations. AG Neovo's Anti-Burn-in™ technology also prevents image ghosting while performing nonstop mission-critical operations. Its metal casing and NeoV™ Optical Glass not only protect the RX-Series from damage but also keep maintenance easy.



Others



AG Neovo RX-Series

### Flexible Integration

The RX-Series is equipped with VGA, DVI, HDMI & DisplayPort 1.2 inputs for analogue and digital signal support respectively. It also has composite (BNC) inputs/ outputs for video looping of surveillance cameras signals and DVRs.



### PID Command & Ctrl Software

PID Command & Ctrl is a software that allows users to control AG Neovo displays via LAN or RS232 connections. It provides a simple and intuitive interface for remote management, OSD-related settings, and easy control on deployed displays. It also can be used to create video walls within minutes and assist system integrators with setting up displays.

- Native tiling support for easy video wall setup (up to 10 x 10)
- EcoSmart Sensor automatically adjusts brightness level according to ambient lighting conditions
- HeatControl Sensors automatically activate the internal cooling fans when temperature rises (42" and 55" only)
- OPS slot ready for easy media player / IPC integration (42" and 55" only)
- Selectable gamma curves optimise different kinds of images
- Flexible display orientation: Landscape/Portrait
- Designed and developed for continuous 24/7 operation
- Premium-grade panel for high reliability and long product lifetime
- Built-in speakers

Specifications	RX-32E	RX-42E	RX-55E
<b>Panel</b>			
Panel Type	LED-Backlit TFT LCD (VA Technology)	LED-Backlit TFT LCD (IPS Technology)	LED-Backlit TFT LCD (IPS Technology)
Panel Size	31.5"	41.9"	54.6"
Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080	FHD 1920 x 1080
Pixel Pitch	0.364 mm	0.483 mm	0.630 mm
Brightness	500 cd/m <sup>2</sup>	700 cd/m <sup>2</sup>	700 cd/m <sup>2</sup>
Contrast Ratio	3000:1	1300:1	1300:1
Viewing Angle (H/V)	178°/178°	178°/178°	178°/178°
Display Colour	16.7M	1.07B	1.07B
Response Time	5 ms	5 ms	5 ms
Surface Treatment	Anti-Glare Treatment (Haze 2%), 3H Hard Coating	Anti-Glare Treatment (Haze 10%), 3H Hard Coating	Anti-Glare Treatment (Haze 10%), 3H Hard Coating
<b>Frequency</b>			
Frequency (H)	31 kHz-92 kHz	31 kHz-92 kHz	31 kHz-92 kHz
Frequency (V)	48 Hz-85 Hz	48 Hz-85 Hz	48 Hz-85 Hz
<b>Signal Input</b>			
DisplayPort	1.2 x 1	1.2 x 1	1.2 x 1
HDMI	1.4 x 2	1.4 x 2	1.4 x 2
DVI	24-Pin DVI-D	24-Pin DVI-D	24-Pin DVI-D
VGA	15-Pin D-Sub x 1	15-Pin D-Sub x 1	15-Pin D-Sub x 1
Component	BNC x 1	BNC x 1	BNC x 1
Composite	BNC x 1 (Share with Component-Y)	BNC x 1 (Share with Component-Y)	BNC x 1 (Share with Component-Y)
<b>Signal Output</b>			
DisplayPort	1.2 x 1	1.2 x 1	1.2 x 1
DVI	29-Pin DVI-I x 1 (VGA/HDMI)	29-Pin DVI-I x 1 (VGA/HDMI)	29-Pin DVI-I x 1 (VGA/HDMI)
Composite	BNC x 1	BNC x 1	BNC x 1
<b>External Control</b>			
IR In	3.5 mm Phone Jack	3.5 mm Phone Jack	3.5 mm Phone Jack
IR Out	3.5 mm Phone Jack	3.5 mm Phone Jack	3.5 mm Phone Jack
RS232 In	2.5 mm Phone Jack	2.5 mm Phone Jack	2.5 mm Phone Jack
RS232 Out	2.5 mm Phone Jack	2.5 mm Phone Jack	2.5 mm Phone Jack
LAN	RJ45 x 1	RJ45 x 1	RJ45 x 1
<b>Other Connectivity</b>			
USB	2.0 x 1 (Service Port / Media Playback)	2.0 x 1 (Service Port / Media Playback)	2.0 x 1 (Service Port / Media Playback)
OPS Slot	-	Yes	Yes
<b>Audio</b>			
Audio In	Stereo Audio Jack (3.5 mm), Stereo Audio Jack (RCA)	Stereo Audio Jack (3.5 mm), Stereo Audio Jack (RCA)	Stereo Audio Jack (3.5 mm), Stereo Audio Jack (RCA)
Audio Out	Stereo Audio Jack (3.5 mm)	Stereo Audio Jack (3.5 mm)	Stereo Audio Jack (3.5 mm)
Internal Speakers	10W x 2	10W x 2	10W x 2
<b>Power</b>			
Power Requirements	AC 100-240V, 50/60 Hz	AC 100-240V, 50/60 Hz	AC 100-240V, 50/60 Hz
On Mode	53W (On)	100W (On)	133W (On)
Standby Mode	< 0.5W	< 0.5W	< 0.5W
Off Mode	0W	< 0.3W	< 0.3W
Power Supply	Internal	Internal	Internal
<b>Glass</b>			
Thickness	4.0 mm (0.16")	4.0 mm (0.16")	4.0 mm (0.16")
Reflection Rate	< 1%	< 1%	< 1%
Transmission Rate	> 97%	> 97%	> 97%
Hardness	> 9H	> 9H	> 9H
<b>Operating Conditions</b>			
Temperature	0°C-40°C (32°F-104°F)	0°C-40°C (32°F-104°F)	0°C-40°C (32°F-104°F)
Humidity	20%-80% (non-condensing)	20%-80% (non-condensing)	20%-80% (non-condensing)
<b>Storage Conditions</b>			
Temperature	-20°C-60°C (-4°F-140°F)	-20°C-60°C (-4°F-140°F)	-20°C-60°C (-4°F-140°F)
Humidity	5%-90% (non-condensing)	5%-90% (non-condensing)	5%-90% (non-condensing)
<b>Mounting</b>			
VESA FPM/PMI	Yes (400 x 200 mm)	Yes (200 x 200 mm)	Yes (400 x 400 mm)
<b>Security</b>			
Kensington Security Slot	Yes	Yes	Yes
<b>Dimensions</b>			
Product w/o Base (W x H x D)	757.6 x 452.0 x 75.1 mm (29.8" x 17.8" x 3.0")	987.2 x 581.2 x 83.0 mm (38.9" x 22.9" x 3.3")	1268.8 x 739.6 x 83.0 mm (50.0" x 29.1" x 3.3")
Packaging (W x H x D)	892.0 x 600.0 x 185.0 mm (35.1" x 23.6" x 7.3")	1161.0 x 759.0 x 203.0 mm (45.7" x 29.9" x 8.0")	1475.0 x 936.0 x 223.0 mm (58.1" x 36.9" x 8.8")
<b>Weight</b>			
Product w/o Base	15.0 kg (33.1 lb)	23.1 kg (50.9 lb)	37.0 kg (81.6 lb)
Packaging	17.6 kg (38.8 lb)	27.1 kg (59.7 lb)	43.7 kg (96.3 lb)
<b>Regulation Approval</b>			
Certifications & Compliance	FCC, CE, CCC, WEEE, RoHS, REACH, LVD, EAC, BSMI	FCC, CE, WEEE, RoHS, REACH, LVD, EAC	FCC, CE, WEEE, RoHS, REACH, LVD, EAC, BSMI
<b>Accessories</b>			
Supplied	Power Cord, RS232 Cable, Remote Control, Batteries, RS232 Daisy Chain Cable, Quick Start Guide	Power Cord, RS232 Cable, Remote Control, Batteries, RS232 Daisy Chain Cable, Quick Start Guide	Power Cord, RS232 Cable, Remote Control, Batteries, RS232 Daisy Chain Cable, Quick Start Guide
<b>Optional Accessories</b>			
Floor Mount	FMS-01, FMS-02, FMC-02	FMS-01, FMS-02, FMC-02	-
Ceiling Mount	-	CMP-01+LMK-02, CMP-01+WMK-03	-
Video Wall Mount	-	VWM-01, VWM-02	VWM-01, VWM-02
Wall Mount	-	LMA-01, WMA-01, LMK-02, WMK-03	LMA-02
Stand	-	STD-04	STD-04
Ceiling Mount (Landscape only)	CMP-01+LMK-02	CMP-01+LMK-01	CMP-01+LMK-01
Wall Mount (Landscape only)	LMA-01, LMK-02, LMA-02	LMK-01, LMK-03, LMA-02	LMK-01, LMK-03
Floor Mount (Landscape only)	-	-	FMC-03+LMK-04, FMC-04+LMK-04
Desk mount (Landscape only)	DTS-01	DTS-01	DTS-01

**Global Headquarters**

Taipei, Taiwan

**EMEA Regional Headquarters**

Capelle a/d IJssel, The Netherlands

**North & South America Regional Headquarters**

San Jose, CA, U.S.A.

**Asia-Pacific Regional Headquarters**

Taipei, Taiwan

**Canada Sales Office**

Vancouver, B.C., Canada

**China Sales Office**

Shanghai, China

**Czech Republic Sales Office**

Brno, Czech Republic

**Denmark Sales Office**

Stoevring, Denmark

**Germany Sales Office**

Mechernich, Germany

**Italy Sales Office**

Livorno, Italy

**Poland Sales Office**

Warsaw, Poland

**Spain Sales Office**

Barcelona, Spain

**Ukraine Sales Office**

Lviv, Ukraine

[www.agneovo.com](http://www.agneovo.com)